THERAPY TUBS®
The Evolution of Bathing

INSTALLATION DETAILS

Emerald 2653

(50 gal. Capacity)

3 WALL TILE FLANGE

TILE FLANGE ON 3 SIDES

DETAIL A

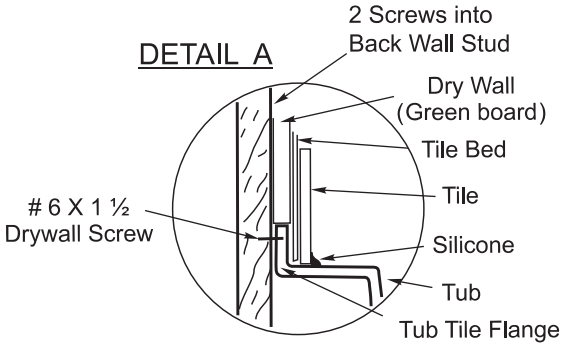

IMPORTANT:
Pre drill 2 screw holes in the tub tile flange on the back of the tub only. Use these two holes to screw the tub to studs. Do not over tighten screws.
Do not force tub flange to studs, this can cause the tub door to not seal properly and could possibly cause a door leak.

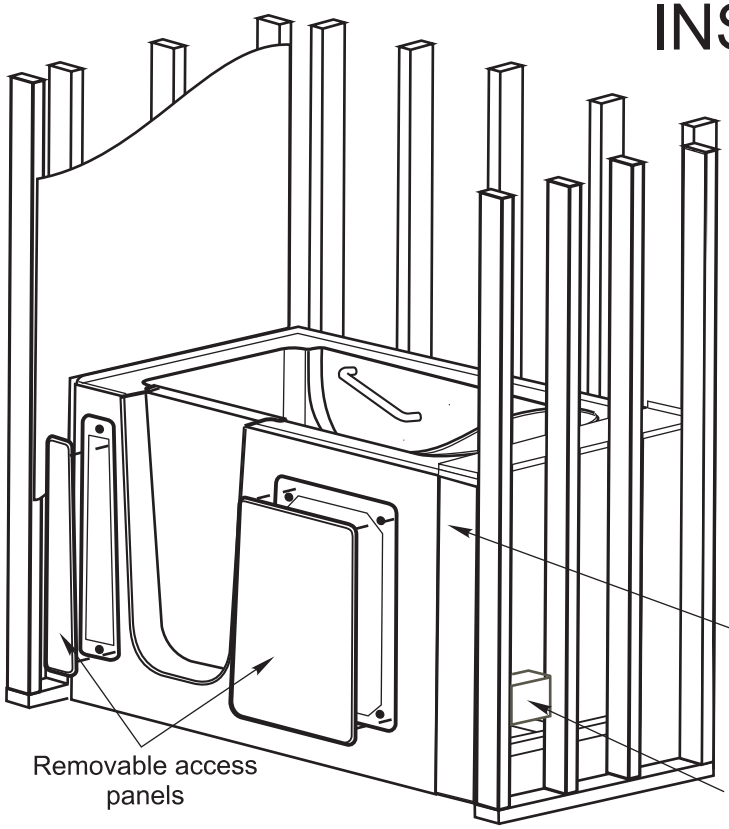

EXTENSION PANEL INSTALLATION

Step 1. Slide front panel "A" onto front of tub.

Step 2. Slide top panel "B" over tile flange.

Step 3. Refer to Detail "A" on fastening flange to studs and sealing.

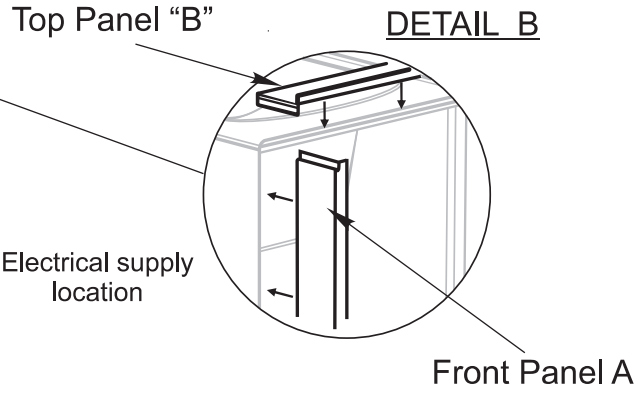

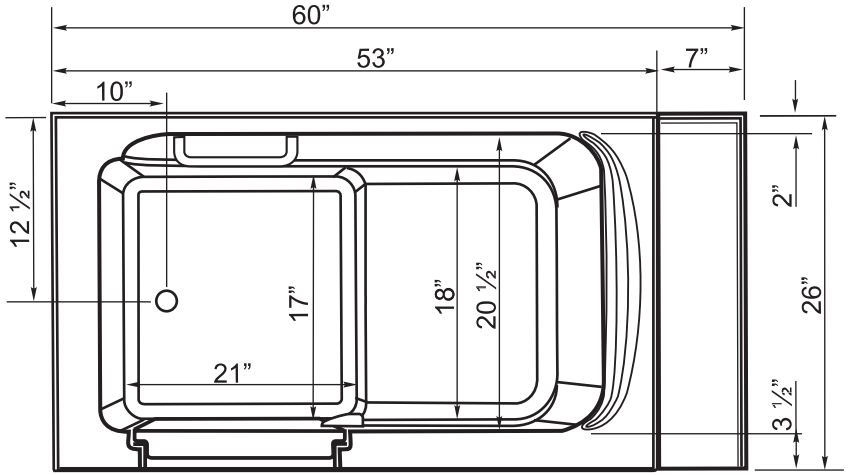

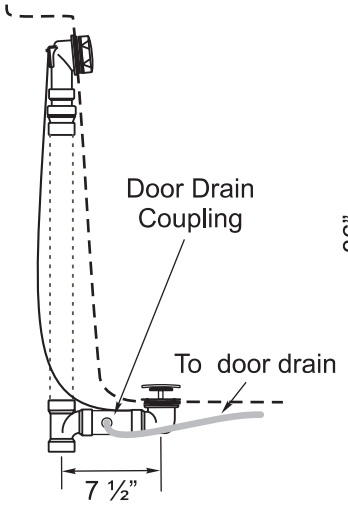

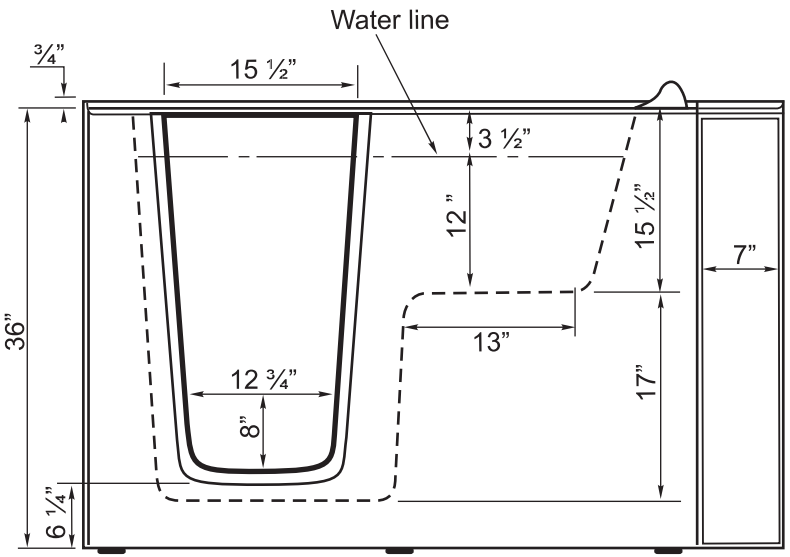

NOTE: *Slight variations in measurements can occur (+ or - ¼").*

© 2013 Therapy Tubs all rights reserved
Rev 0913